




NTN BEARUNG DRIVESHAFT, INC.

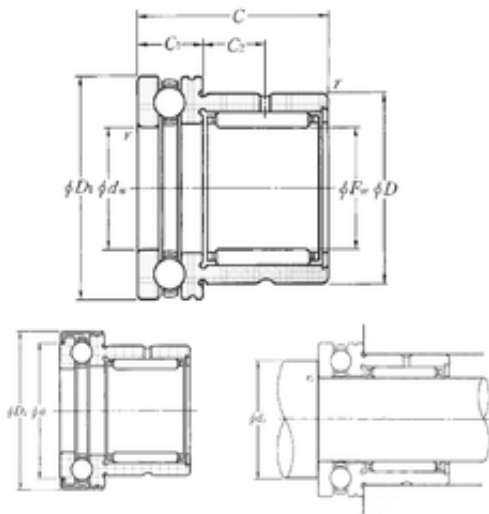

NKX25T2Z Bearing 2D drawings and 3D CAD models

NTN NKX25T2Z complex bearings

Bearing No. NKX25T2Z

Bore Diameter	25 mm
Outer Diameter	43 mm
d	25 mm
Fw	25 mm
D	37 mm
D1	42 mm
D2	43 mm
C	30 mm
a	37,7 mm
r min.	0,6 mm
C1	11 mm
da min.	35 mm
ra max.	0,6 mm
C2	9,5 mm
Weight	0,132 Kg
Dynamic load rating radial (C)	14,2 kN
Dynamic load rating axial (C)	19,6 kN
Static load rating radial (C0)	24 kN
Static load rating axial (C0)	37 kN
(Grease) Lubrication Speed	4600 r/min
dw	25 mm
rs min	0.6 mm
Dw	2 mm
Dw1	6.35 mm
Lw	13.8 mm



NTN BEARUNG DRIVESHAFT,INC.

Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.13 kg
Cr	14.2 kN
Ca	19.6 kN
C0r	24 kN
C0a	37 kN
Nlim (grease)	4,600 rpm
Nlim (oil)	6,500 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
da min	35 mm
ras max	0.6 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.131
Product Group	B04144
bore diameter:	25 mm
static load capacity:	2450 kgf
outside diameter:	43 mm
maximum rpm:	6500 RPM
overall width:	30 mm
flanges:	No Flange
needle bearing type:	Machined Bearing with No Inner Ring
series:	NKX..Z
closure type:	Double Shielded



NTN BEARUNG DRIVESHAFT,INC.

lubrication hole type:	No Hole
dynamic load capacity:	1450 kgf
precision rating:	Not Rated